


Connecting Mongoose MTP-3 MK2 with MHA2000 Home Alarm Panel

Configure MTP-3 jumpers

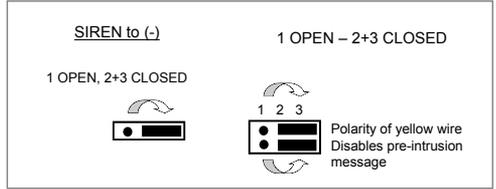

Insert SIM card into the MTP-3
before making wiring connections

Connect MTP-3 wires to MHA2000 control panel terminal block

- RED to V+
- BLACK to GND
- YELLOW to GND
- BROWN to O/P

Initialise MTP-3 with **1122#N** for unlimited triggers as MHA2000 cannot reset the MTP-3

